

Fig. 1A


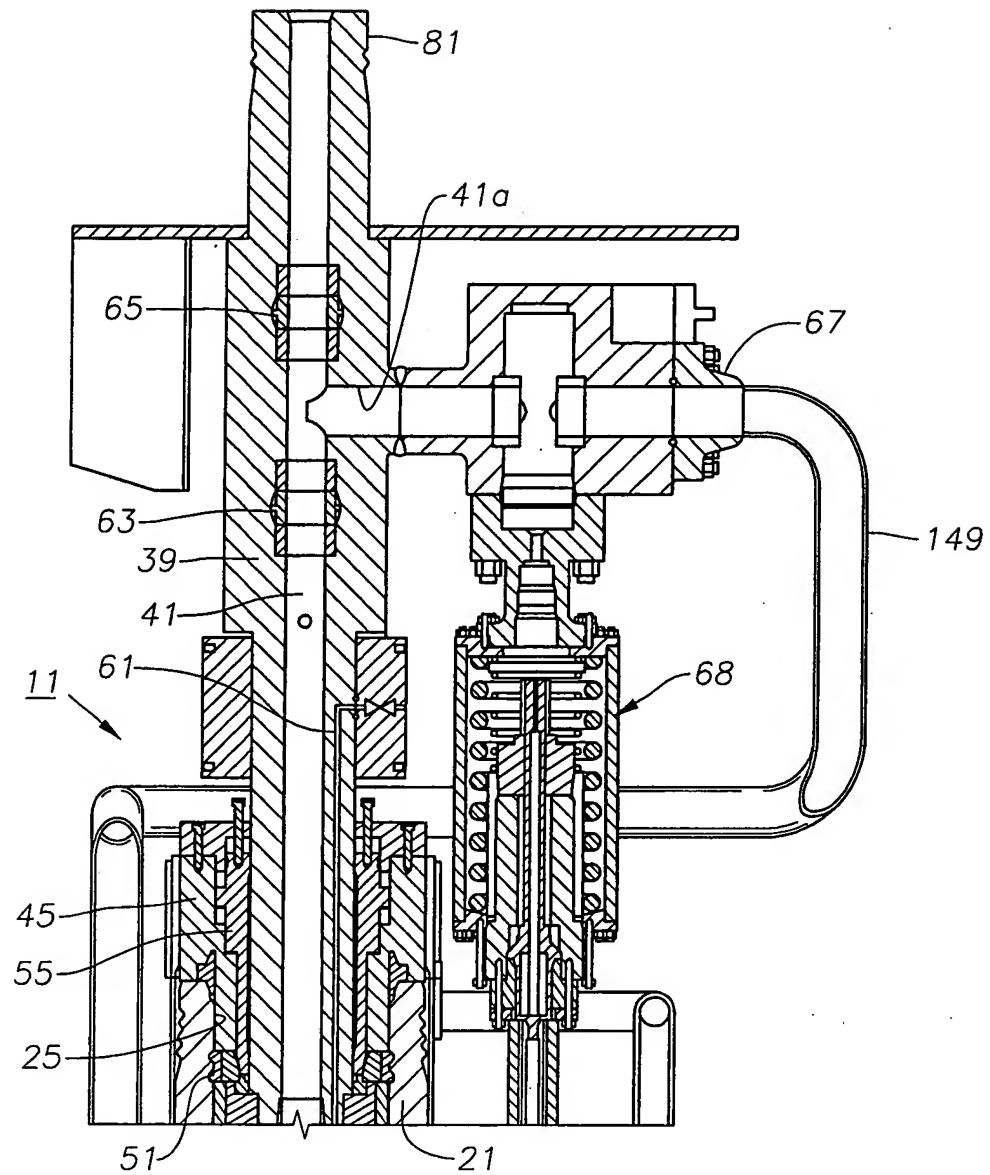


Fig. 1B

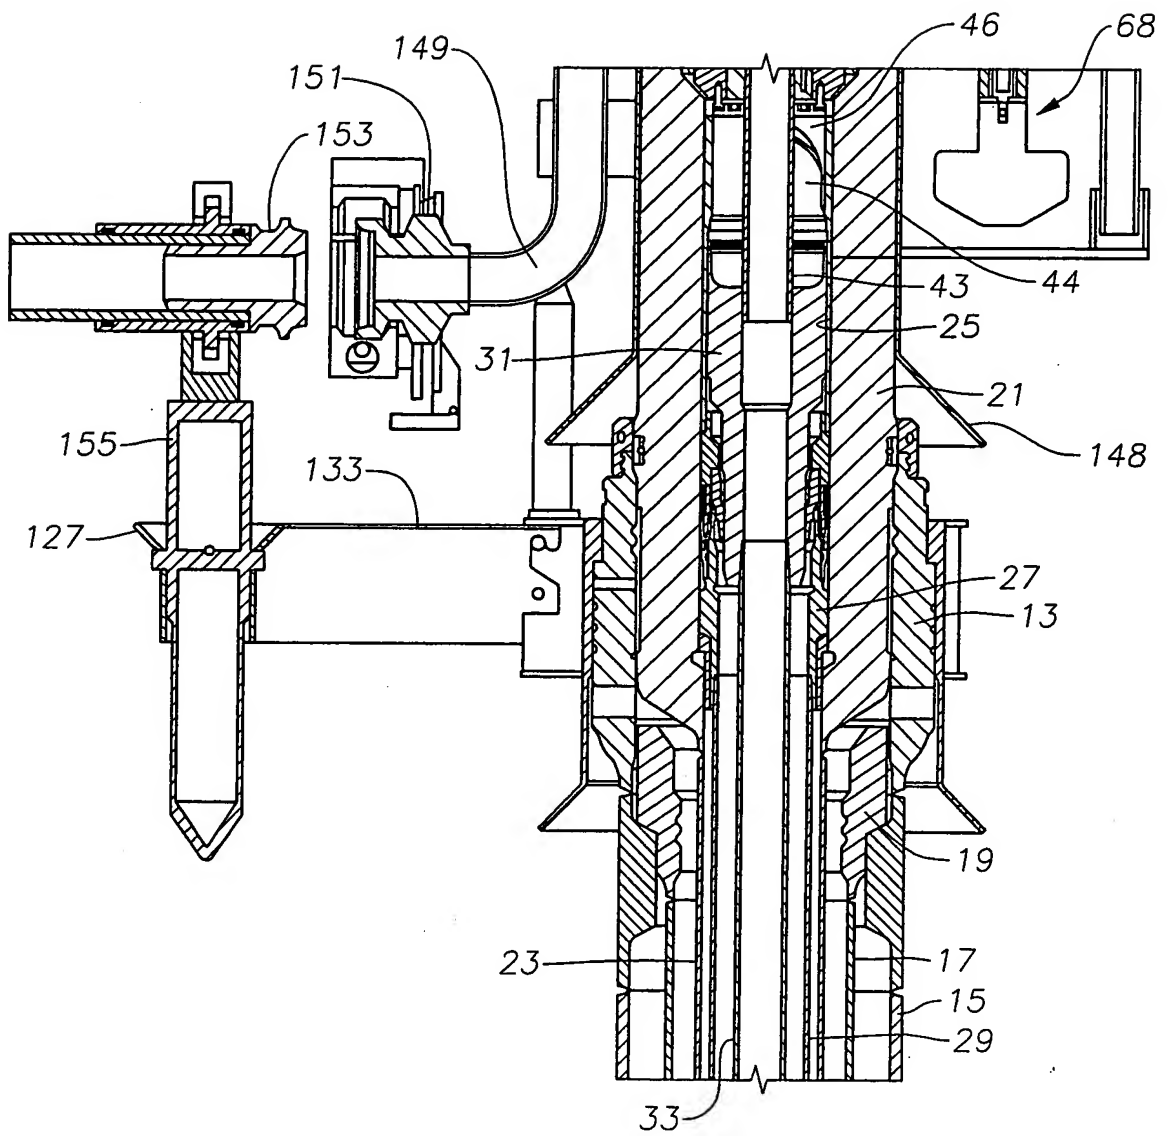

3/16

Fig. 2

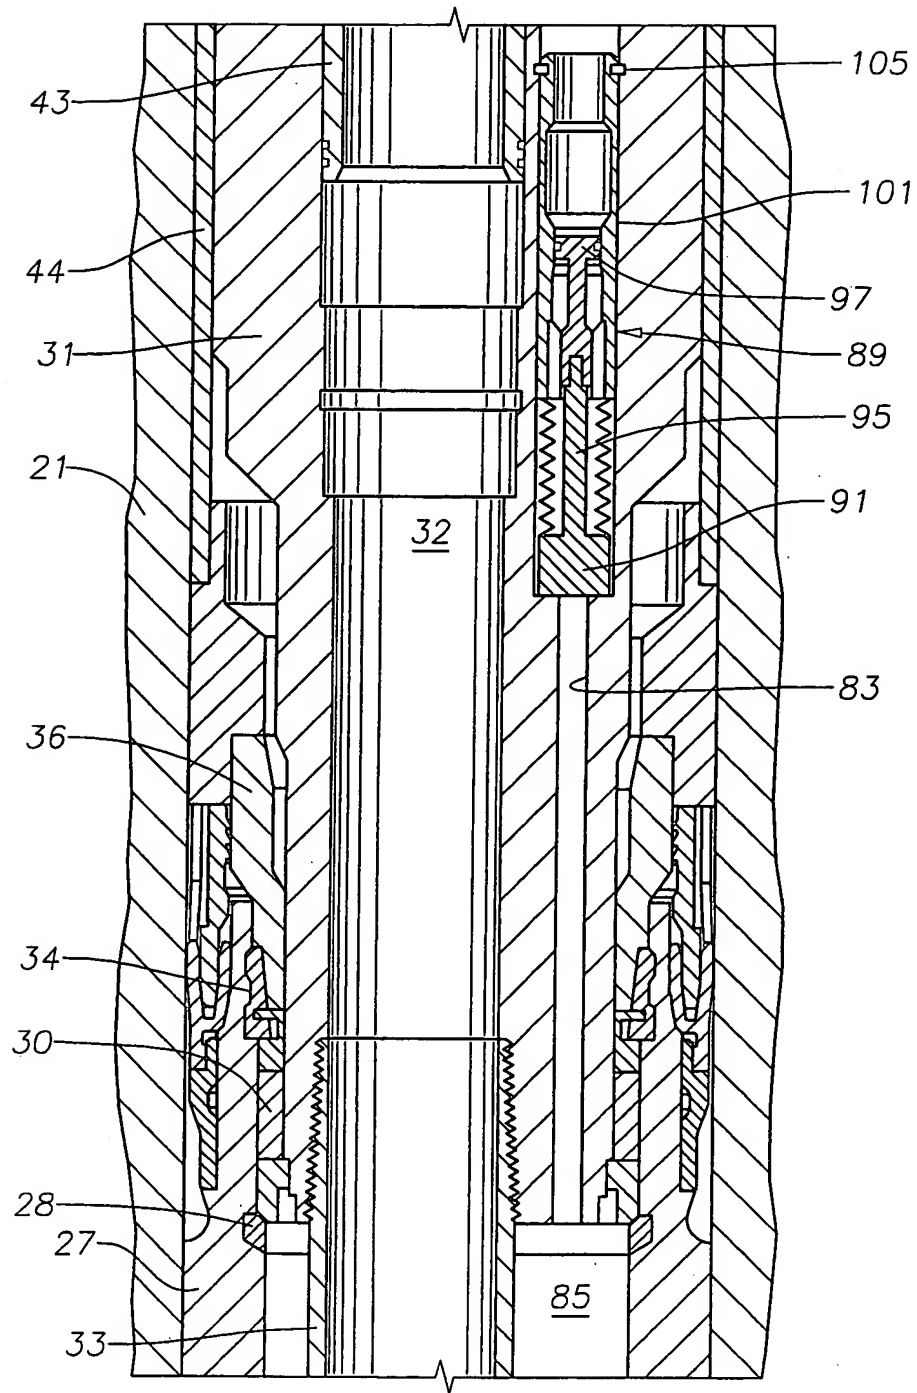
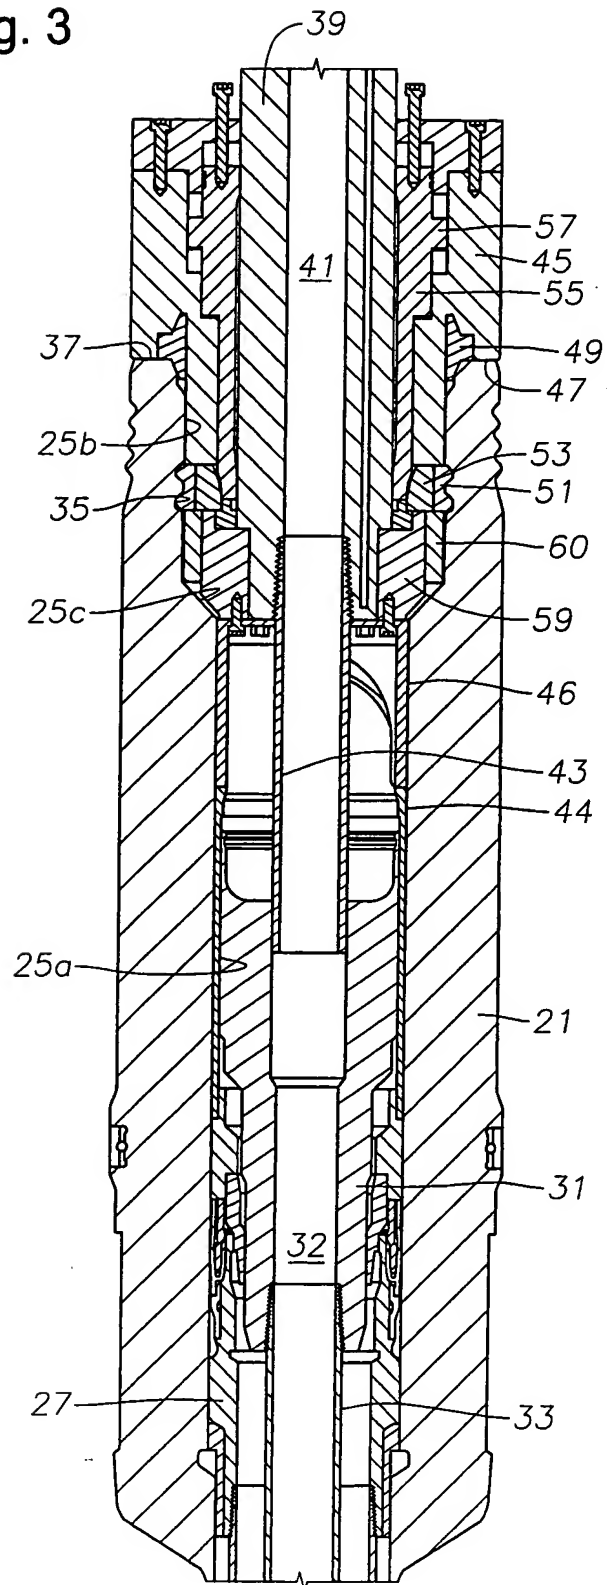


Fig. 3



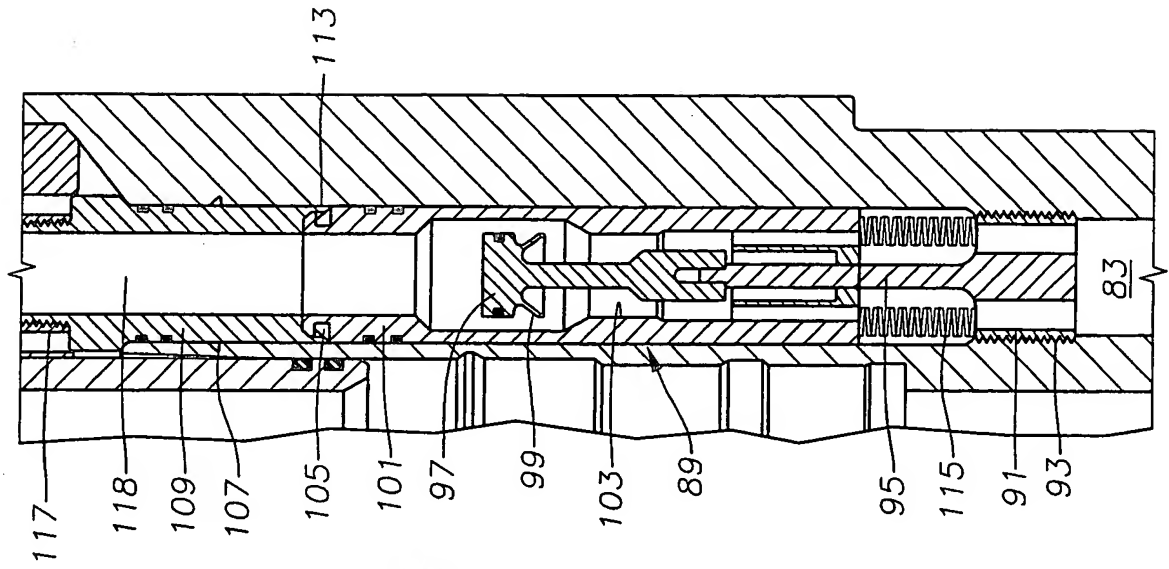


Fig. 5

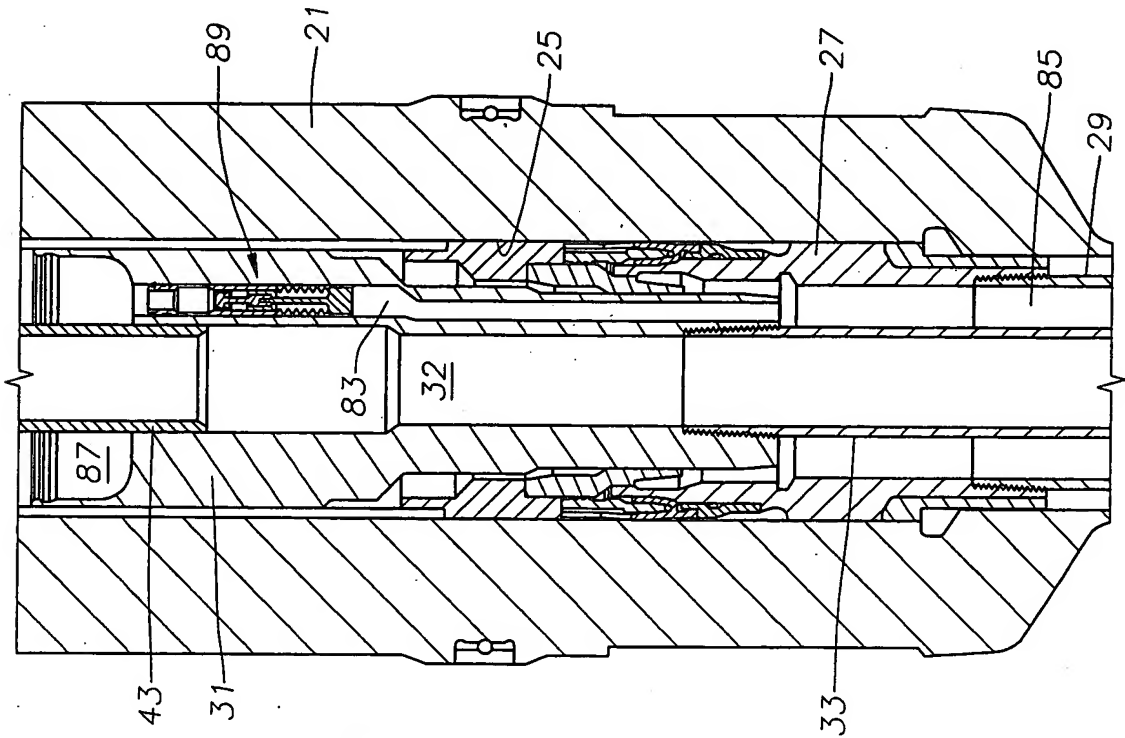


Fig. 4

6/16

Fig. 6


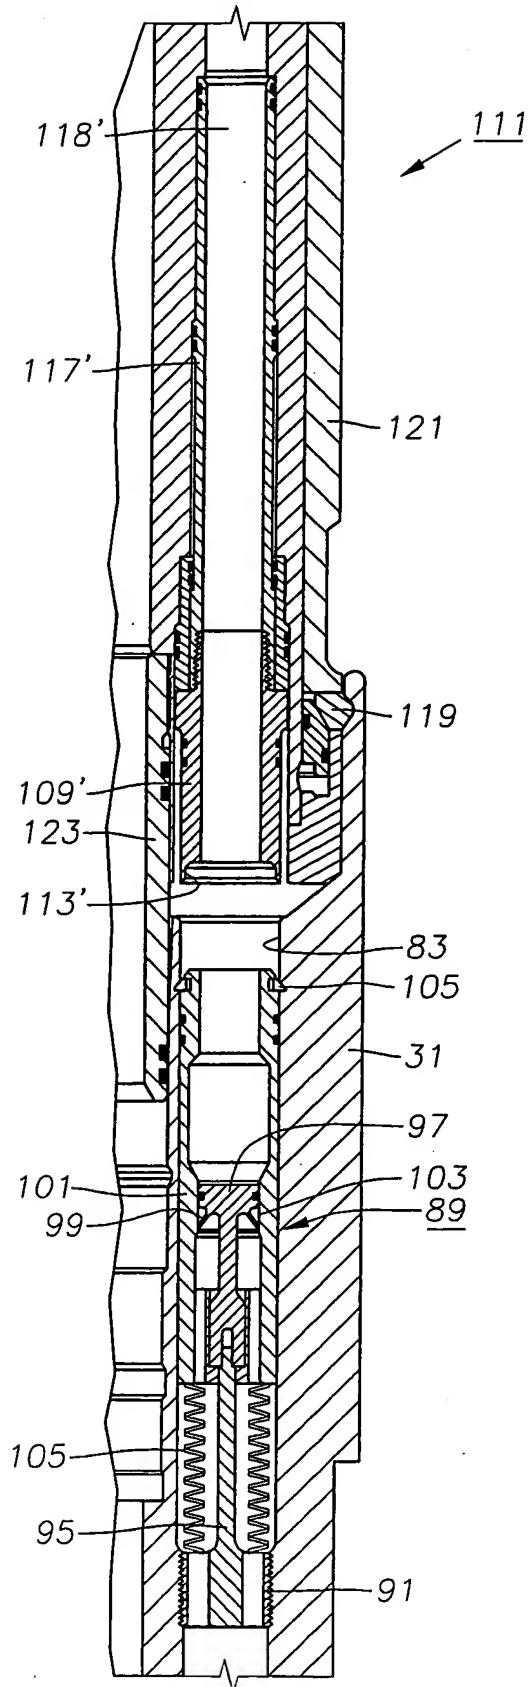


Fig. 7

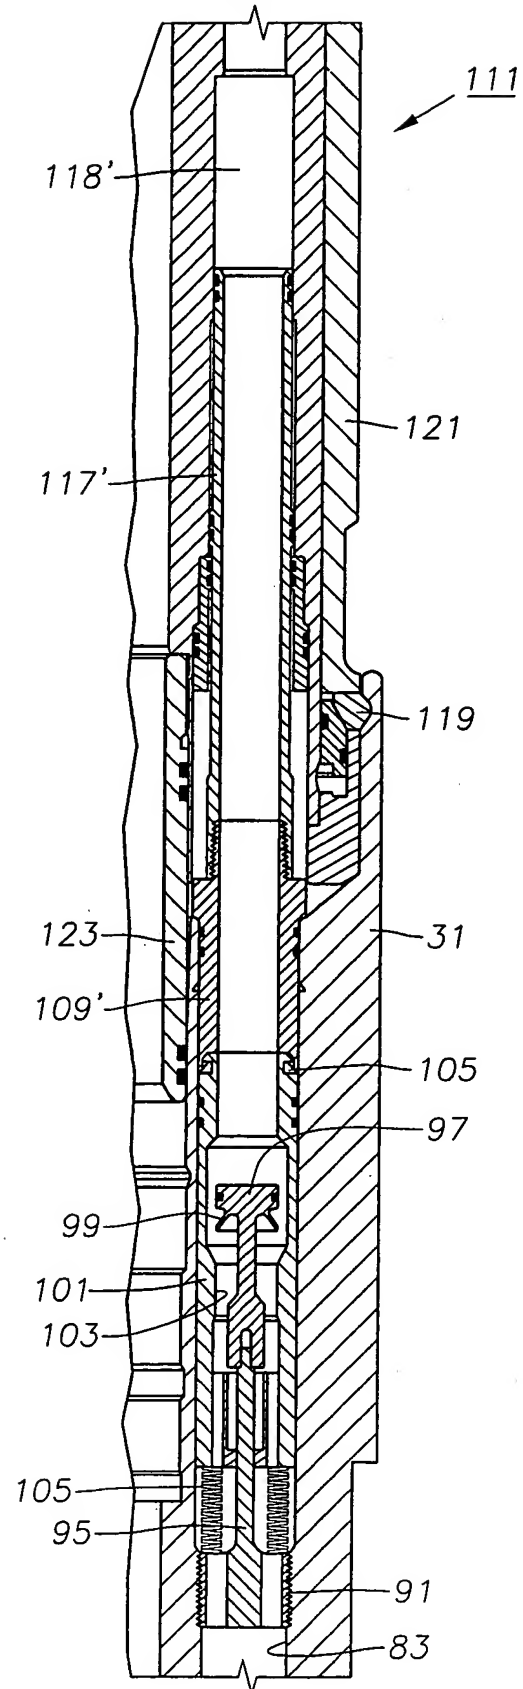

7/16

Fig. 8

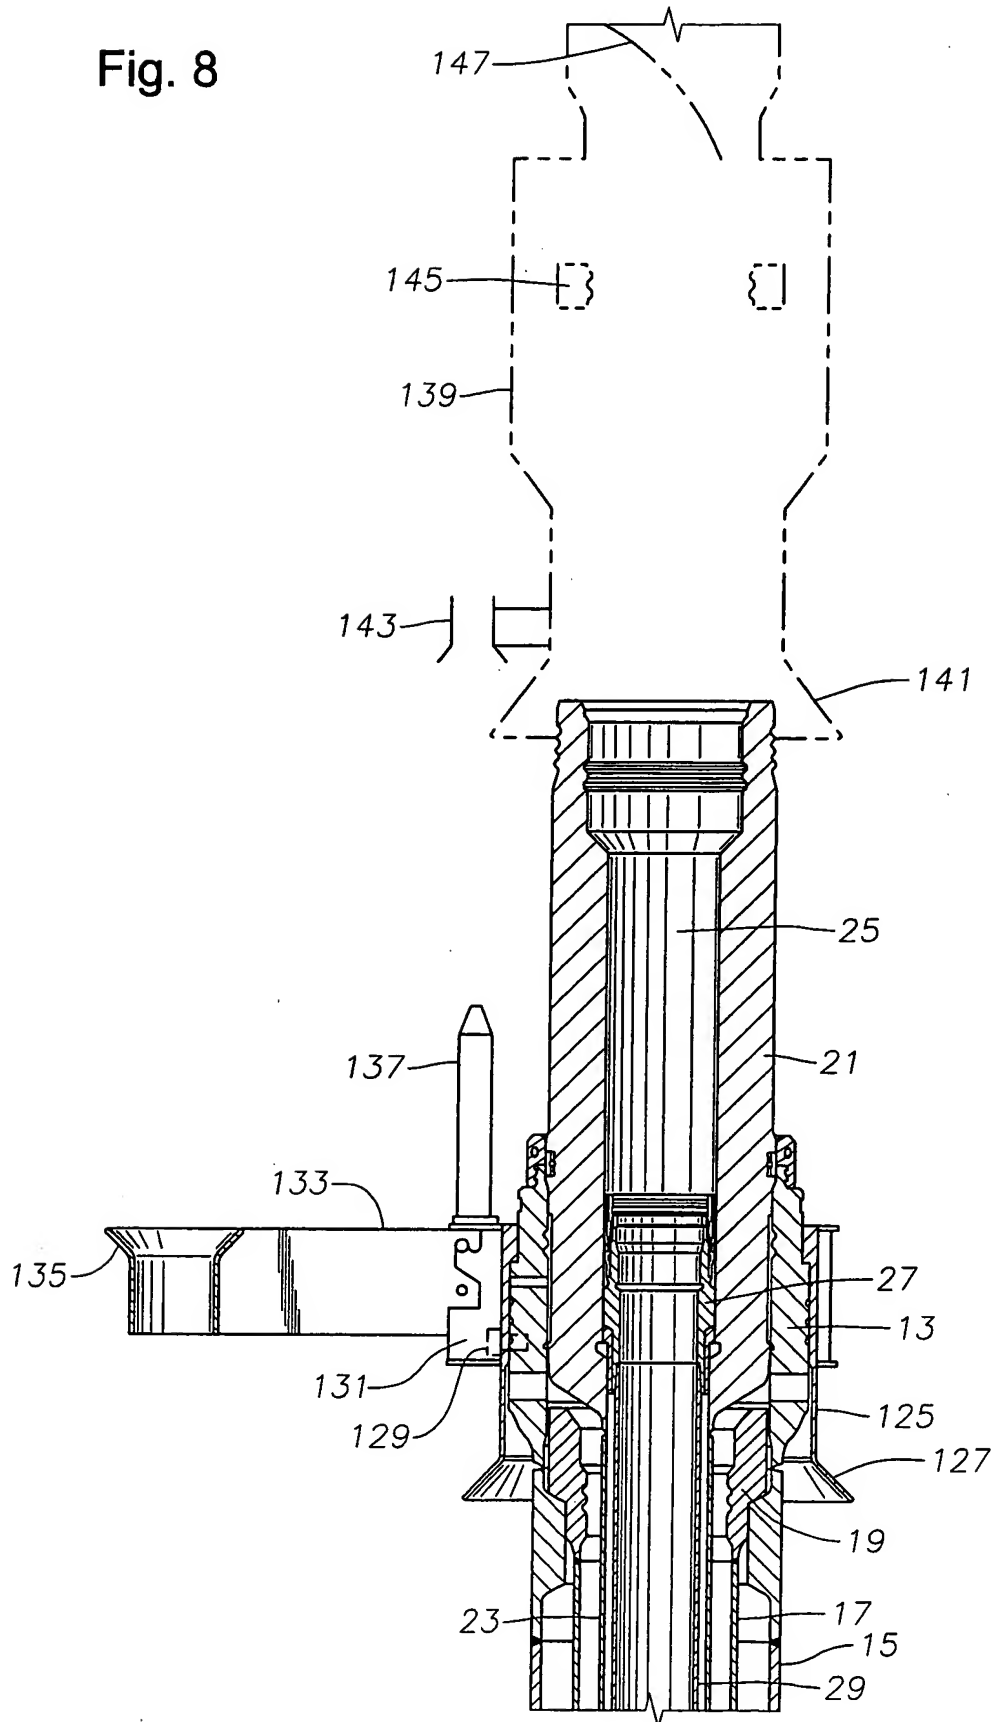


Fig. 9


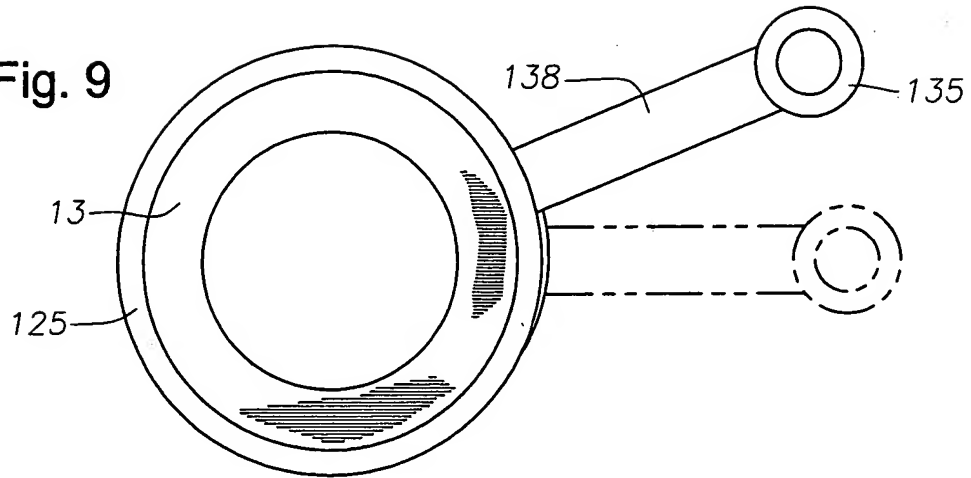


Fig. 10

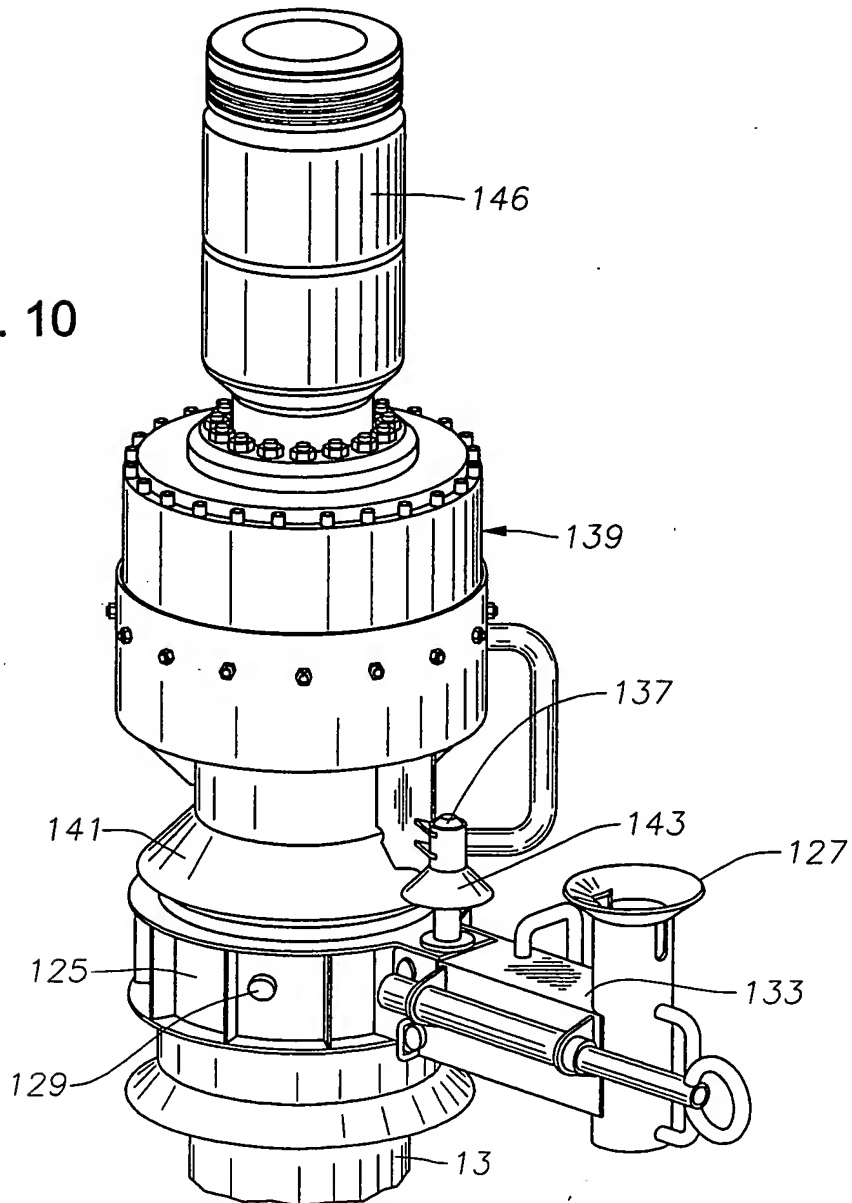

9/16

Fig. 11

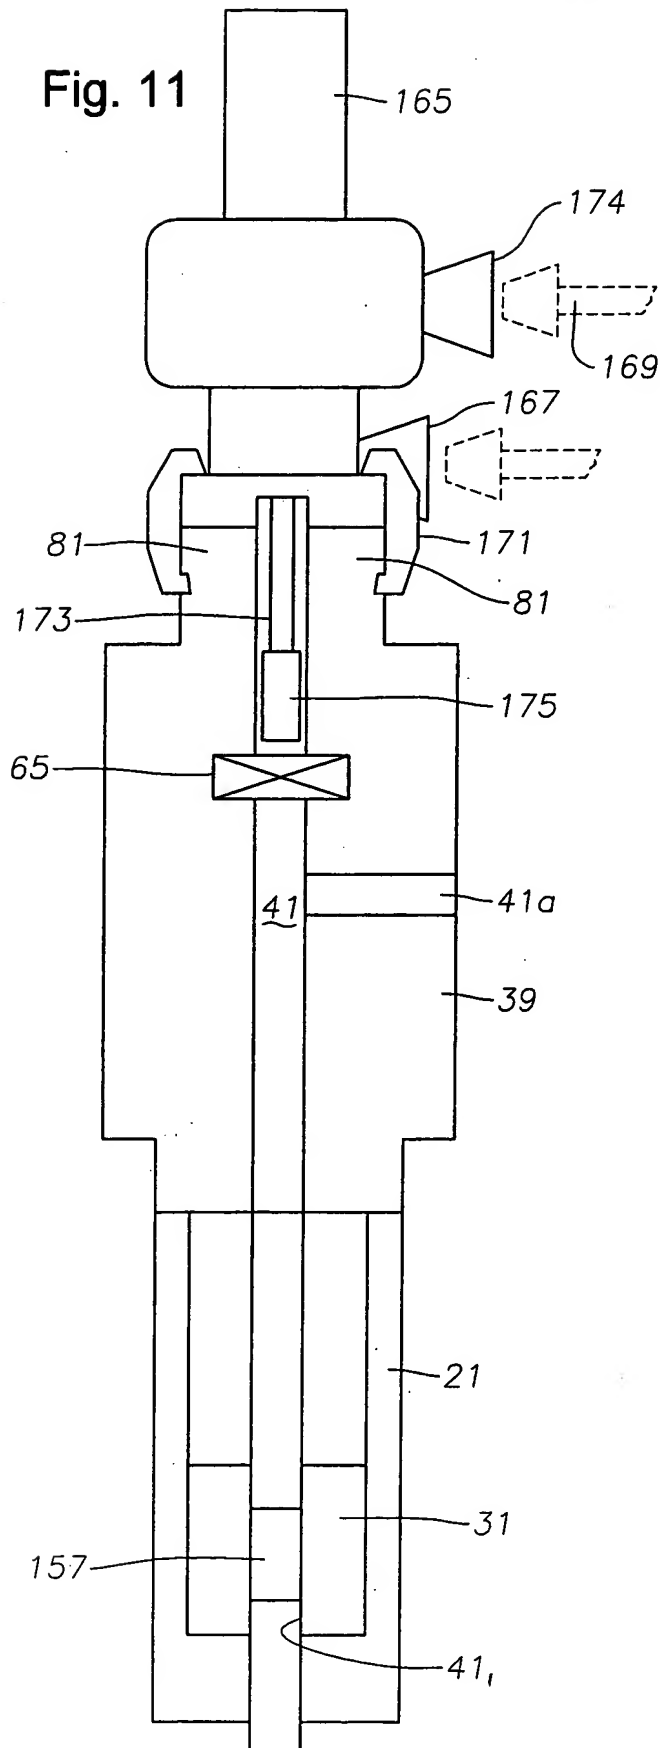


Fig. 12

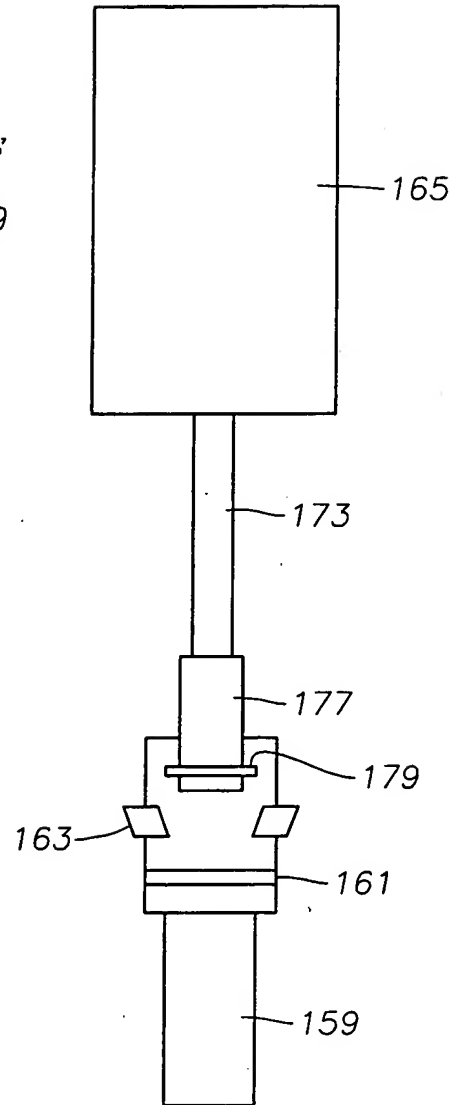


Fig. 13

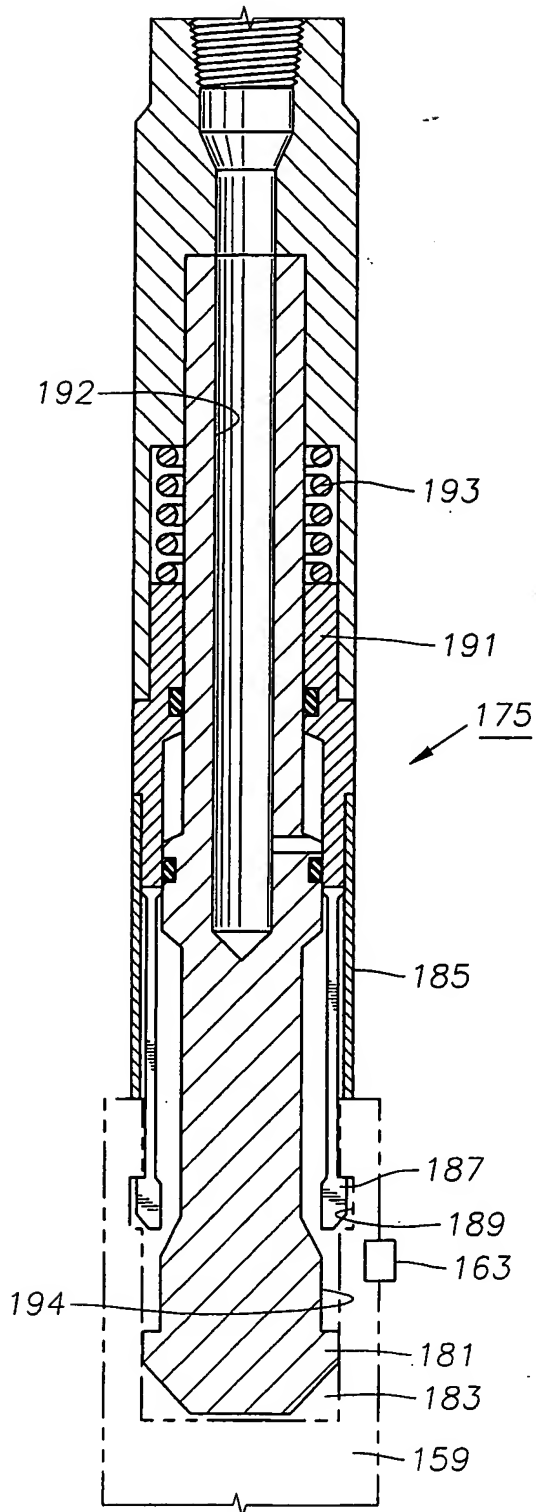
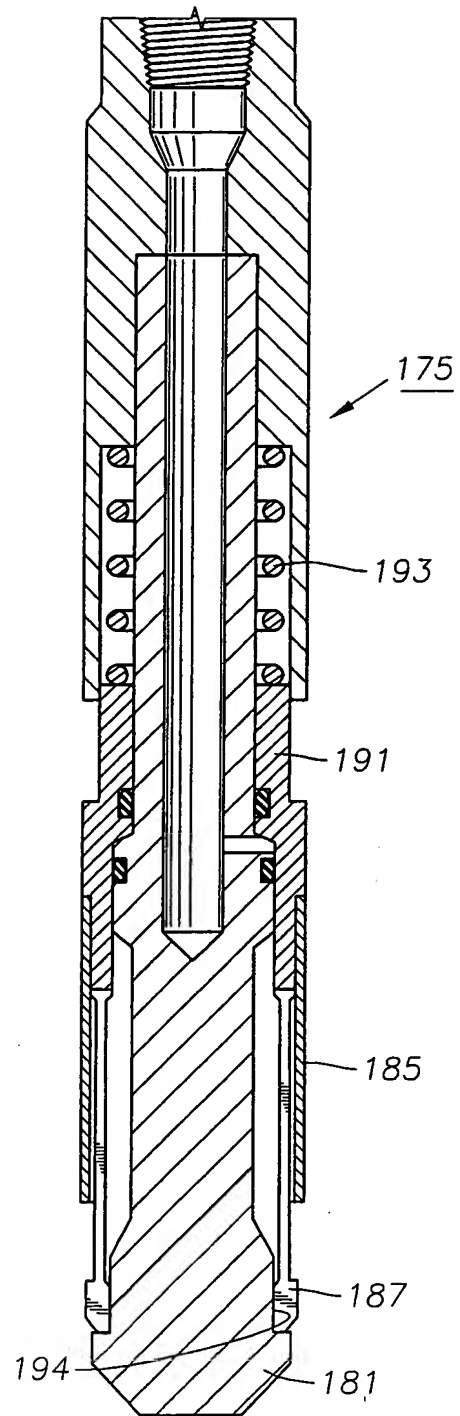


Fig. 14



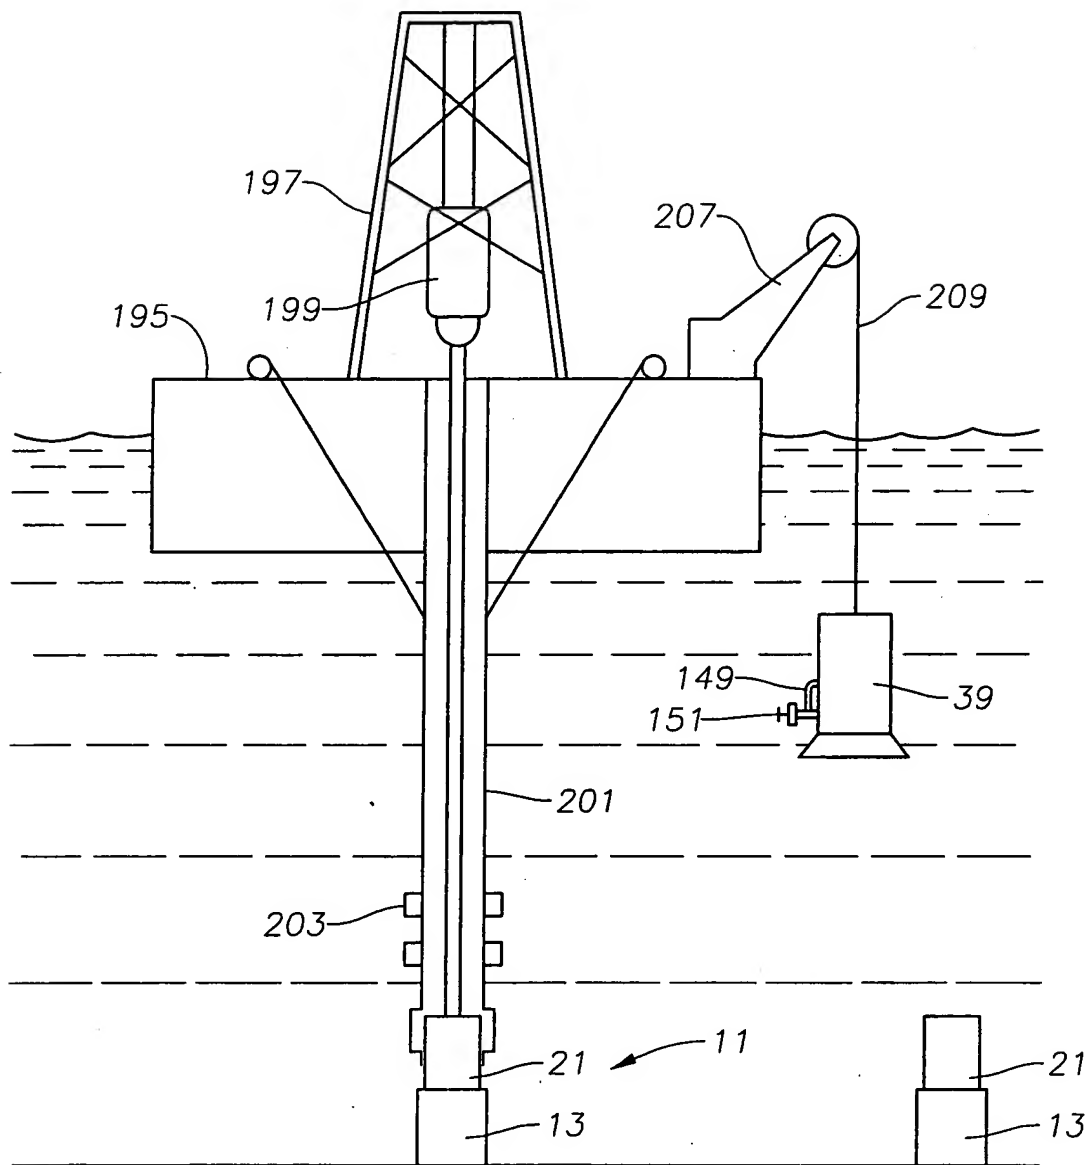


Fig. 15

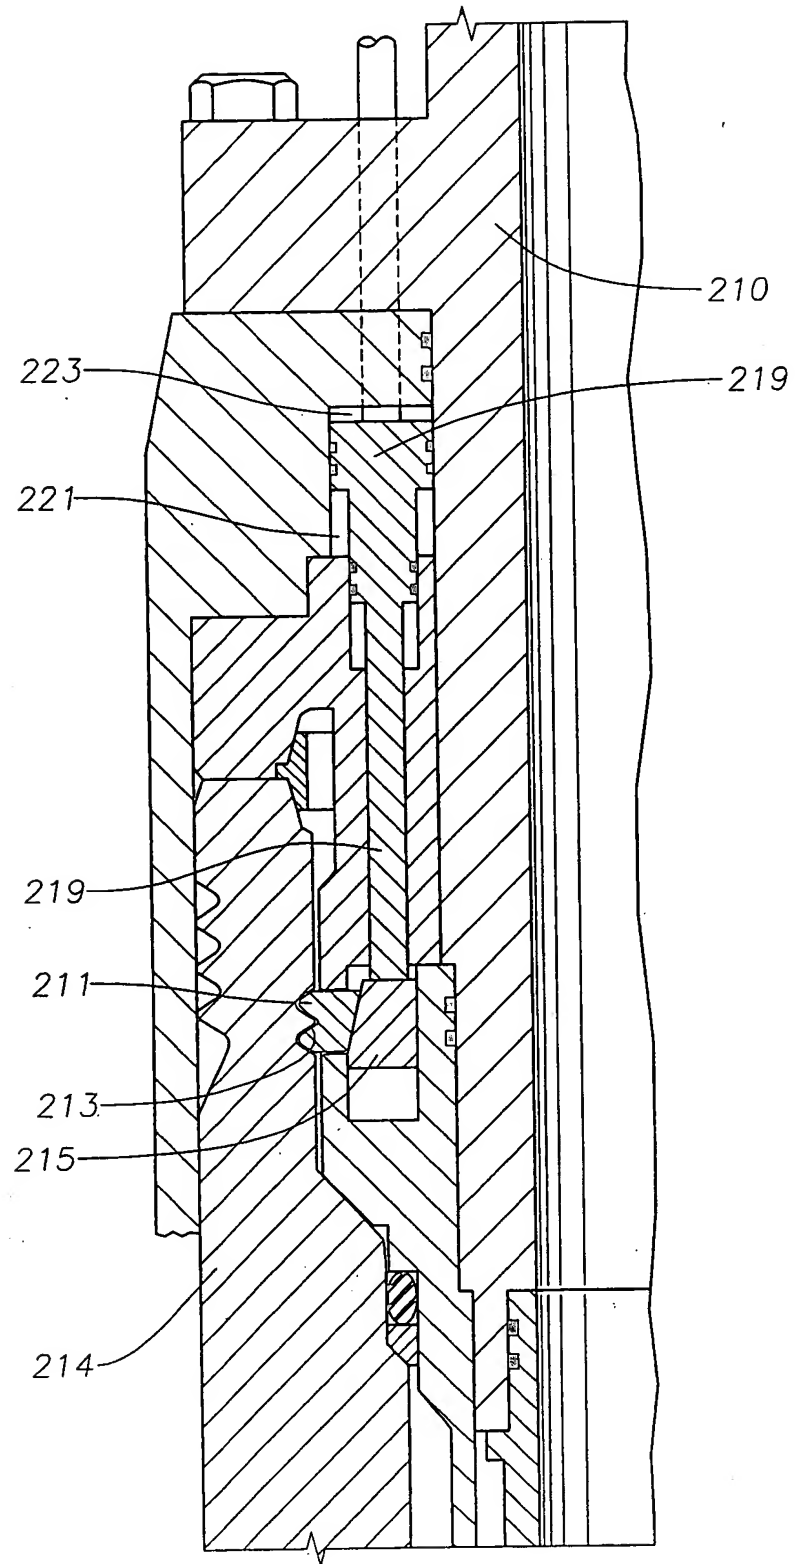


Fig. 16

Fig. 17

Fig. 17 is a perspective view of the device 11. The device features a main body with a control panel 226 on the right side, which includes several buttons and a display. A central shaft 13 extends from the bottom of the device. The shaft is surrounded by a series of concentric rings or housing sections, including sections 125, 127, and 129. A probe 155 is attached to the side of the device, featuring a handle 153 and a tip 135. The probe is connected to the main body via a cable or conduit 151. Other components labeled include 149, 153, 226, 229, 155, 135, 133, 227, 39, and 125.

Fig. 18

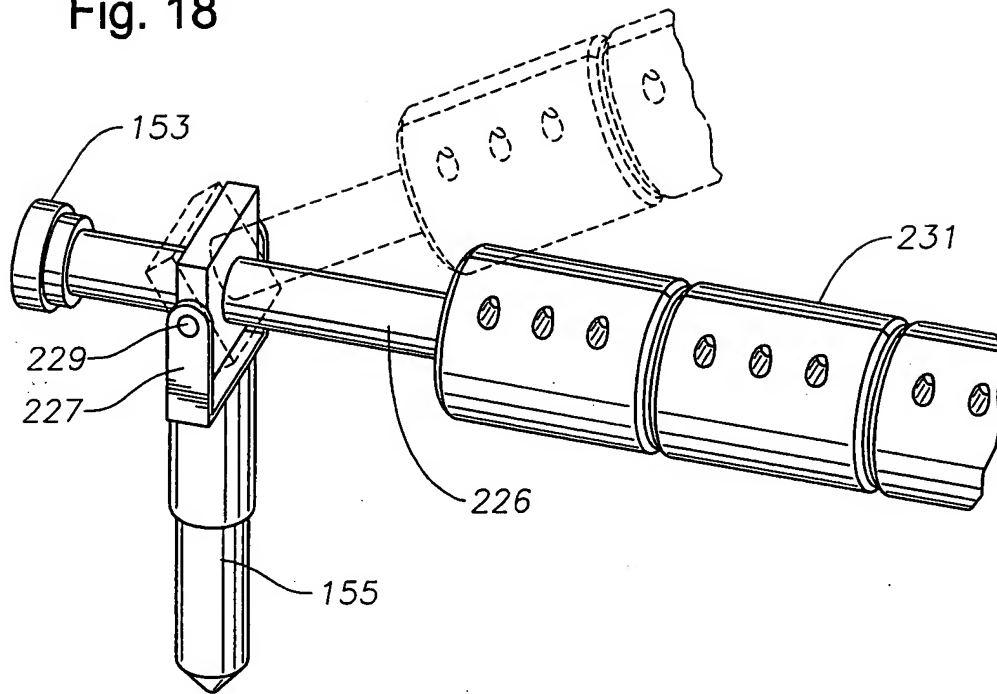
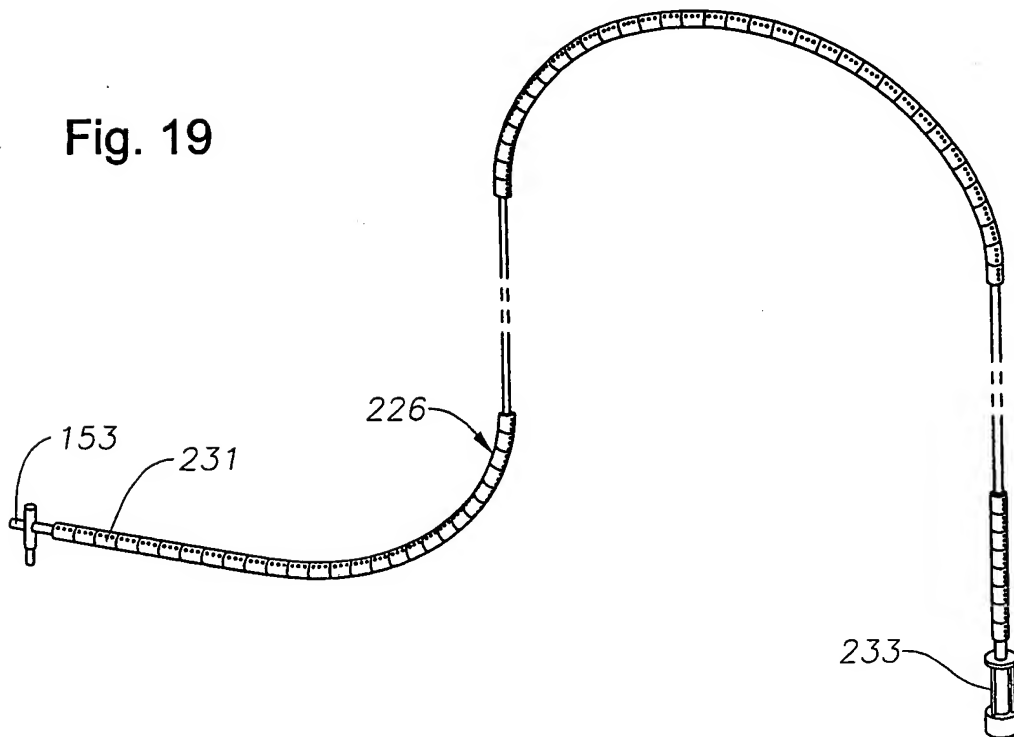


Fig. 19



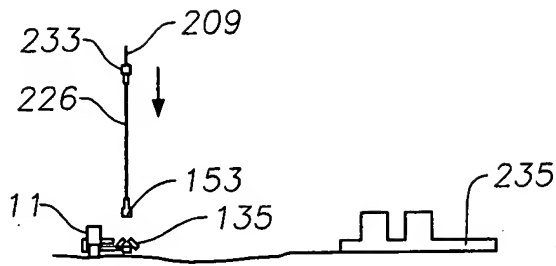


Fig. 20

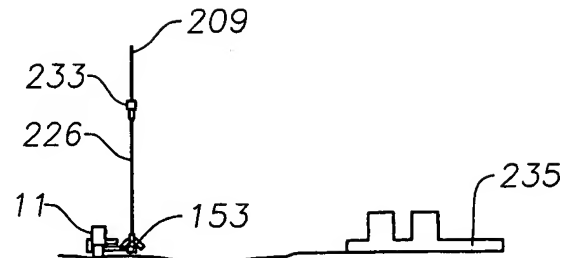


Fig. 21

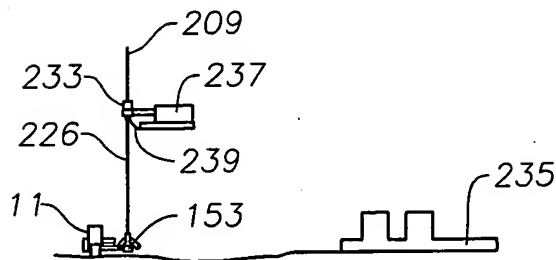


Fig. 22

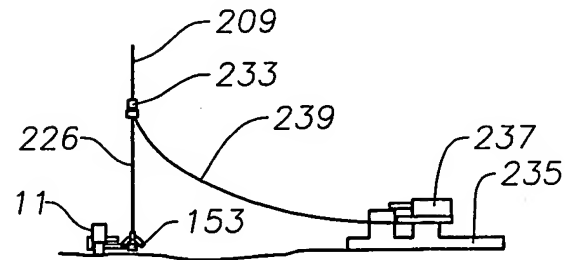


Fig. 23

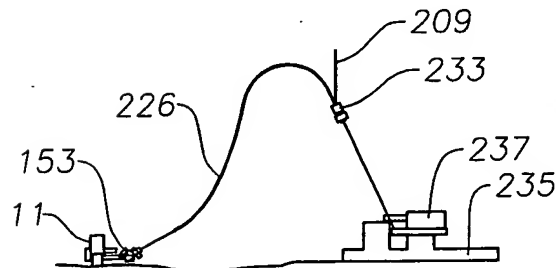


Fig. 24

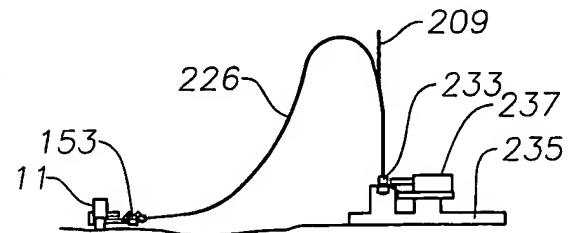


Fig. 25

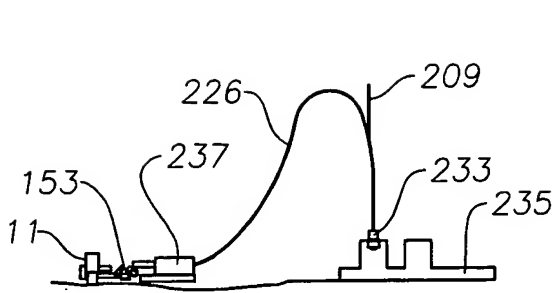


Fig. 26

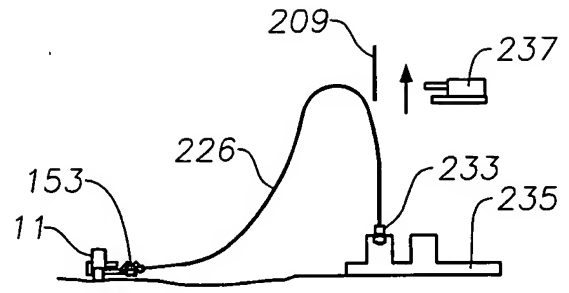


Fig. 27

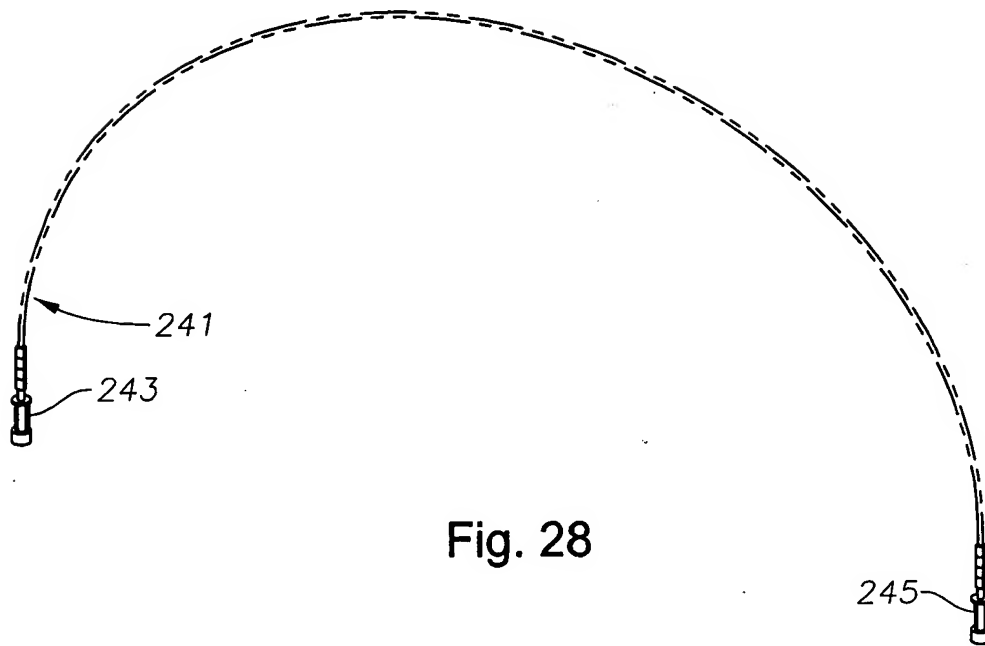


Fig. 28